



STO - High Efficiency Takeoff

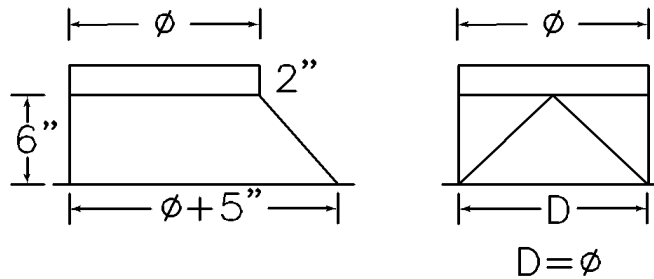

W/DAMPER

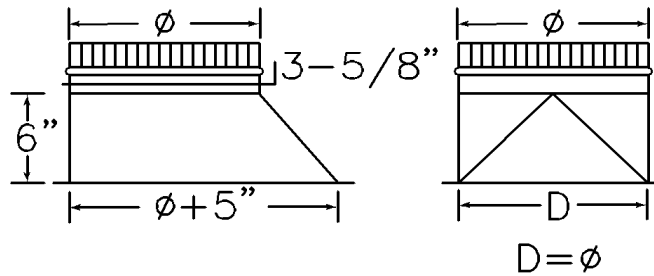

RECTANGULAR CONNECTION HAS A 1" FLANGE CONNECTION WITH FULL CORNERS AND 1/8" THICK ADHESIVE GASKET. RUBBER GROMMETS INCLUDED ON VOLUME DAMPERS FOR AN AIRTIGHT SEAL.

PRODUCT AVAILABILITY

Sizes Available:

4"	9"
5"	10"
6"	12"
7"	14"
8"	16"

- Standard with open corners
- Available with closed corners
- Available with volume dampers and hardware. Optional 2" standoff hardware available.

Technical Data

- 26 gauge galvanized G-90 coating
- Available in speciality materials
 - ♦ Stainless Steel (304 and 316)
 - ♦ Aluminum
 - ♦ PVC
 - ♦ Paint Grip

STO



Hranec Sheet Metal, Inc.
Spiral Manufacturers